


Coro piano v edge »air« datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. edge model with filigree ceiling edge. The downlight is mounted with a simple tension spring mechanism and requires no screw fittings.

Version with remote power supply unit, connection to 230 VAC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The fixed lens optic has a light cone of 60°.

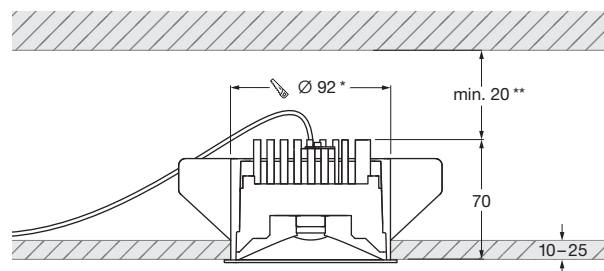



* cut-out dimensions
** minimum thermal distance, installation height depending on driver

dimensions in mm

technical data Coro piano v edge »air«

properties	material	aluminium, glass, painted, plastic
	weight	1 kg
surface	tube	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro piano v edge »air« lighting effects

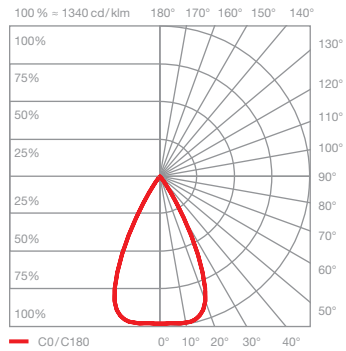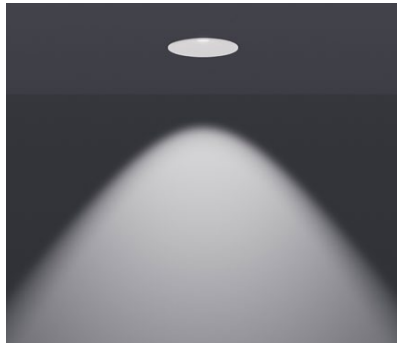

lens

direct light, beam angle approx. 60°

optics: lens

power: high color 9 W

luminous flux: 2200–3500 K 310–410 lm
2700–4000 K 360–430 lm