
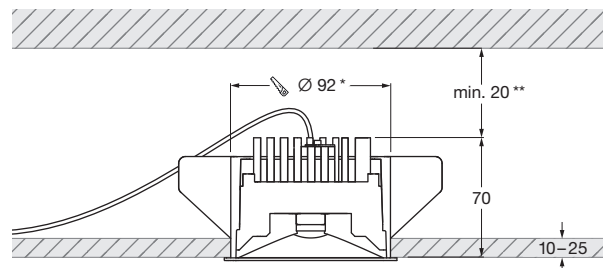


## Coro piano v edge pro datasheet

LED recessed spotlight with fixed lens optics and 60° light cone (downlight non-tiltable) for hollow ceilings or solid ceilings with ceiling box. edge model with filigree ceiling edge. The spotlight is mounted with a simple tension spring mechanism and requires no screw fittings. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit.

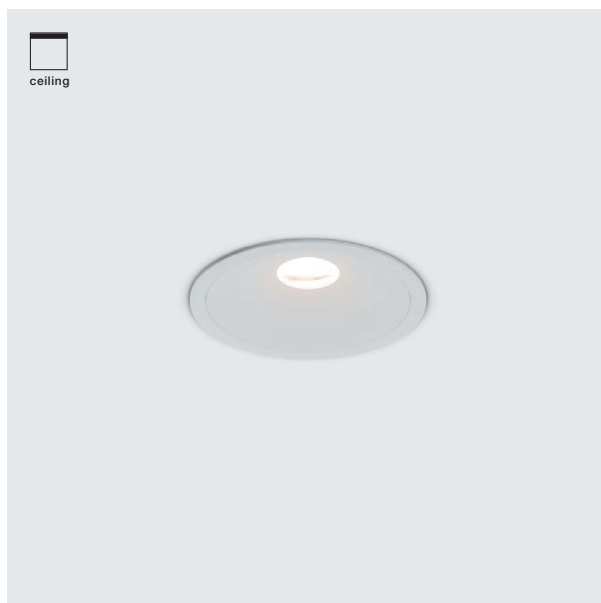

\* cut-out dimensions



\*\* minimum thermal distance, installation height depending on driver

dimensions in mm

### technical data Coro piano v edge pro

properties	material	aluminium, glass, PVD coated, painted, plastic
	weight	0.7 kg
surface	tube	matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (63 lm / W, @4000 K single color)
	power	LED 9 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 18 VDC color tune (2-channel): max. 1000 mA total current ( $I_1 + I_2$ ) / 9 VDC per channel
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

## Coro piano v edge pro lighting effects

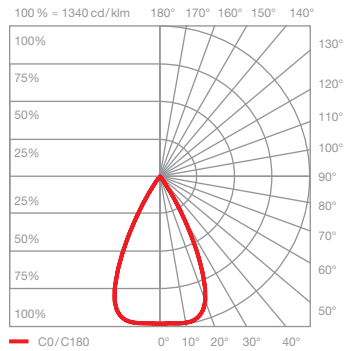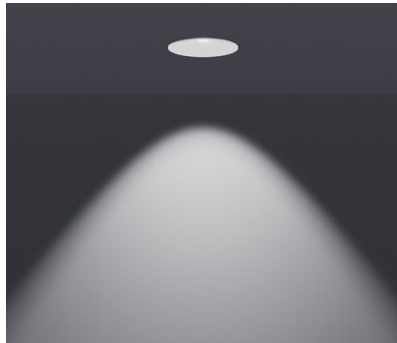

### lens

direct light, beam angle approx. 60°

optics: lens

power: high color 9 W

luminous flux:	2700 K	430 lm
	3000 K	460 lm
	4000 K	520 lm
	2200–3500 K	310–410 lm
	2700–4000 K	360–430 lm