
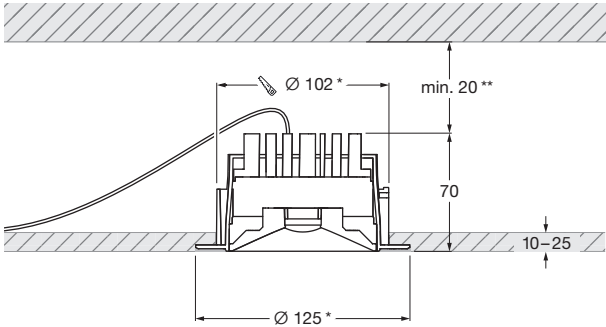


Coro piano v pure phase-cut  
datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. pure model for frameless installation. The downlight is mounted with a separate plaster ring. Version with remote power supply unit, connection to 230 VAC mains voltage. Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering.

The fixed lens optic has a light cone of 60°.

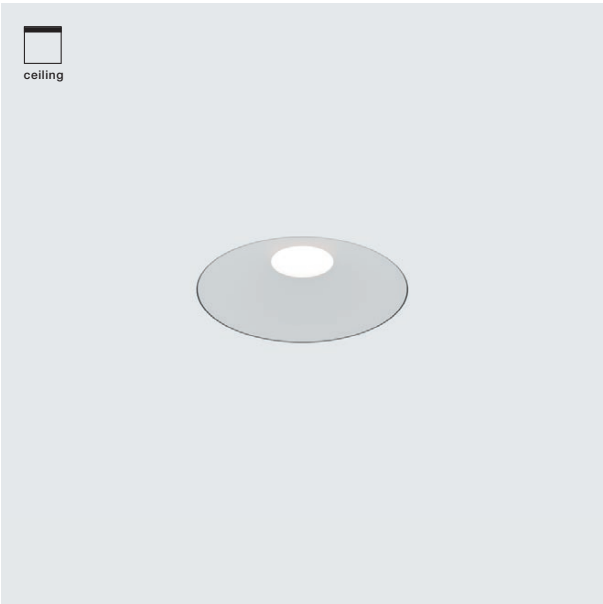

\* cut-out and surrounding fold required  
for mounting; matching step grinder  
optionally available



\*\* minimum thermal distance, installation  
height depending on driver

dimensions in mm

technical data Coro piano v pure phase-cut

properties	material	aluminium, glass, painted, plastic
	weight	0.8 kg
surface	tube	matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	2700K / 3000K / 4000 K (2-step)
electricity	dimming	via trailing-edge phasecut
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

## Coro piano v pure phase-cut lighting effects

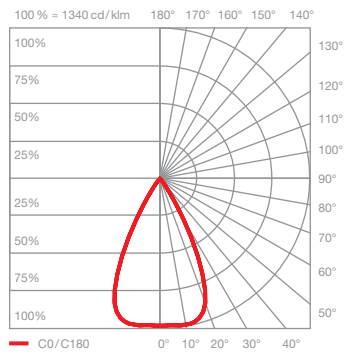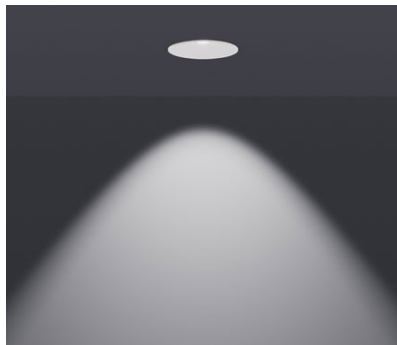

### lens

direct light, beam angle approx. 60°

optics: lens

power: high color 9 W

luminous flux: 2700 K 430 lm  
3000 K 460 lm  
4000 K 520 lm