

Puro faro singolo low voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.



Ceiling luminaire Occhio Puro faro singolo consisting of

body Occhio faro singolo - different length and surfaces
head Occhio Puro - different lighting effects and surfaces
Occhio accessories - different mounting options and surfaces

IP 20     



Puro faro singolo C

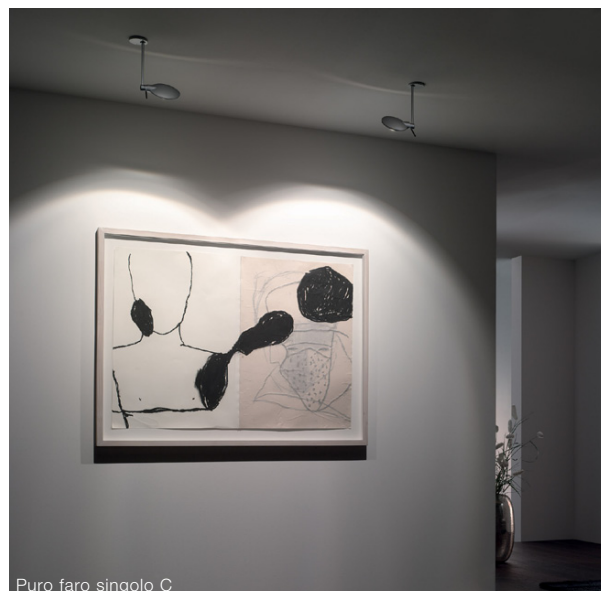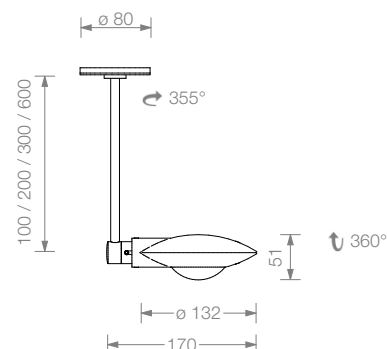

Puro faro singolo C

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length/rotation angle

10 cm, 20 cm, 30 cm, 60 cm/355°

recommended lighting effects

C, E, P, Q see p.2 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100


weight

body and reflector head max. 1,1 kg

mounting accessories

for surface or recessed mounting, see p.4 cutsheet
external gear necessary

Puro faro singolo recommended lighting effect


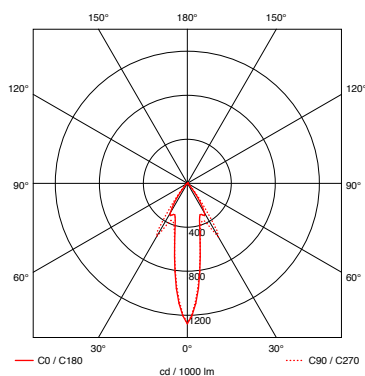


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

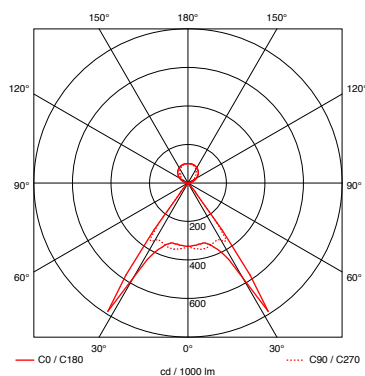
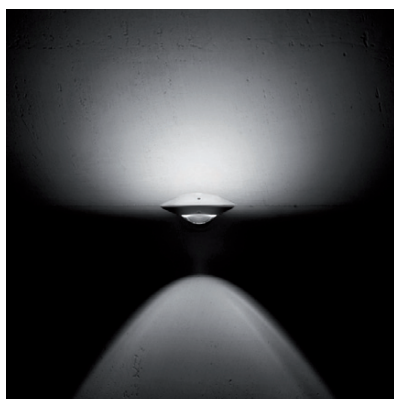


Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°



material / surface
lense optical glass
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

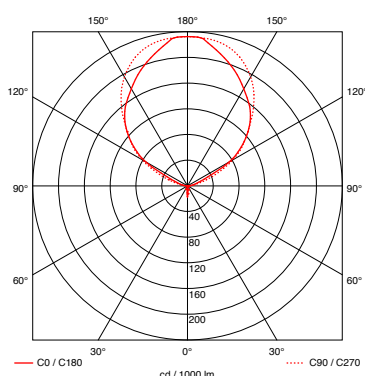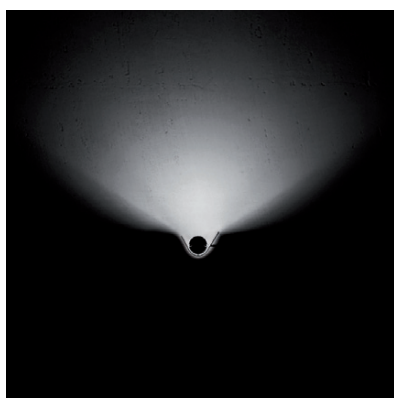

Puro P
reflector head for diffuse light in a symmetrical
direction

efficiency of reflector head
55%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

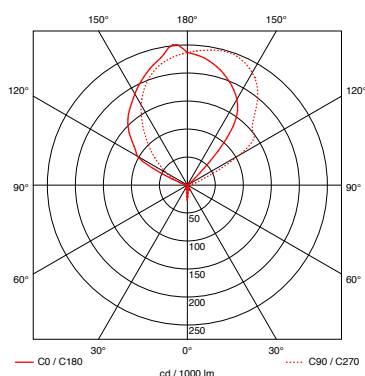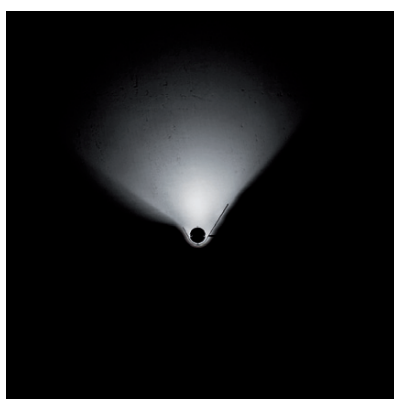

Puro Q
reflector head for diffuse asymmetric light in
one direction


efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome




cutsheet

Puro faro singolo
Item numbers

Item number
_matt chrome M
_chrome C

faro singolo 	max. 60 W low voltage halogen GY6.35 turnable	10 cm 20 cm 30 cm 60 cm	7F 10 00 _ 7F 11 00 _ 7F 12 00 _ 7F 14 00 _
--	---	----------------------------------	--



Puro C 	reflector sphere/ lense	7 K 00 41 _
Puro E 	satinised glass/ lense	7 K 00 44 _
Puro P 	reflector tray, symmetrical	8 K 00 21 _
Puro Q 	reflector tray, asymmetrical left version right version	8 K 00 22 _ 8 K 00 22 _ R



--	--	--	--

cutsheet

Occhio



4 | 4

Puro faro singolo
Item numbers

Item number
_matt chrome M
_chrome C




mounting transformer on site

flat box 	for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W 	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W 	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W 	for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo 	mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
	track version	matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F