

Puro verticale low voltage halogen


Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.



Wall luminaire Occhio Puro verticale consisting of

- body Occhio verticale - different length and surfaces
- head Occhio Puro - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     

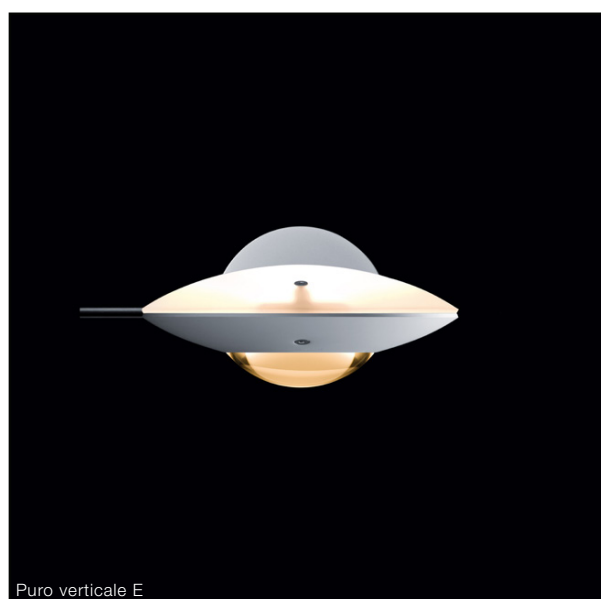

Puro verticale E

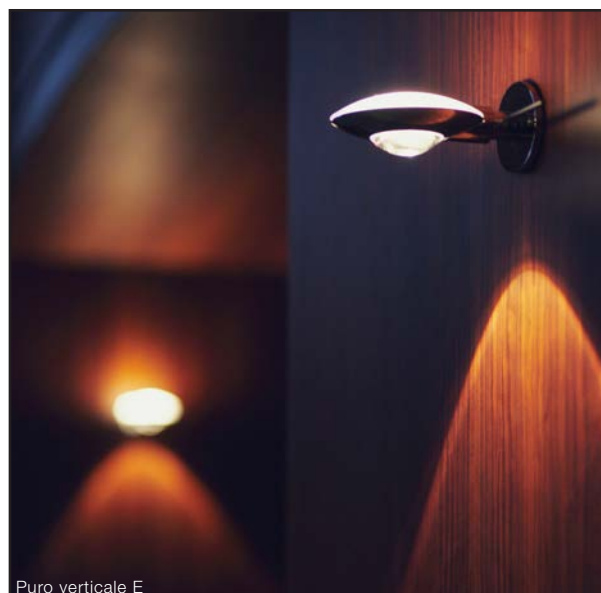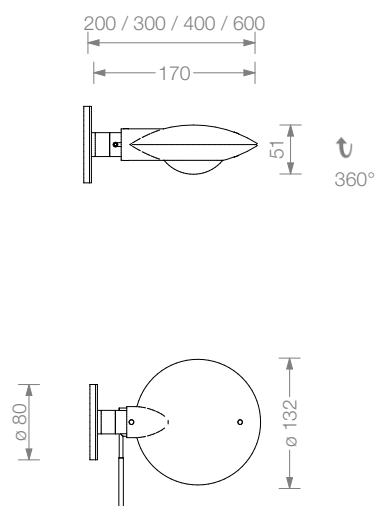

Puro verticale E

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length
20 cm, 30 cm, 40 cm, 60 cm
length including reflector head

recommended lighting effects
A, B, C, D, E, see p.2 and p.3 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h



luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 1,3 kg

mounting accessories
for surface or recessed mounting, see p.5 cutsheet



Puro verticale recommended lighting effect

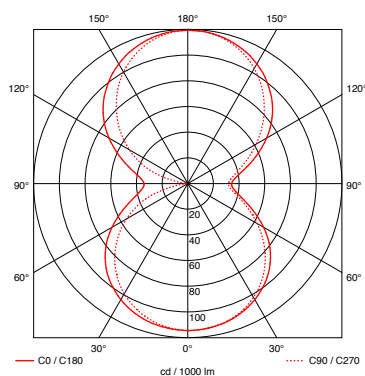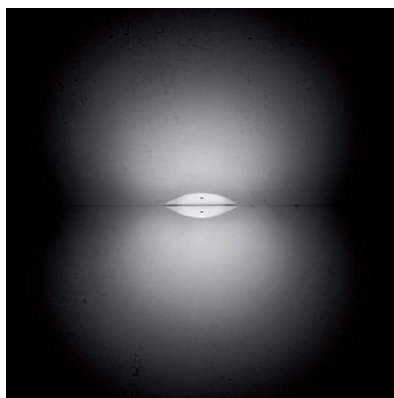

Puro A
reflector head for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
satinised heat-proof glass
fixture matt chrome or chrome

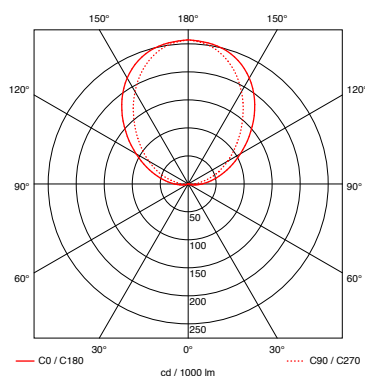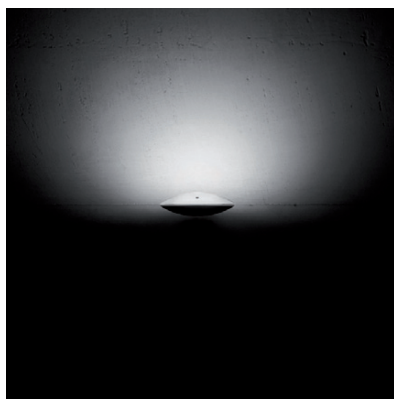

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

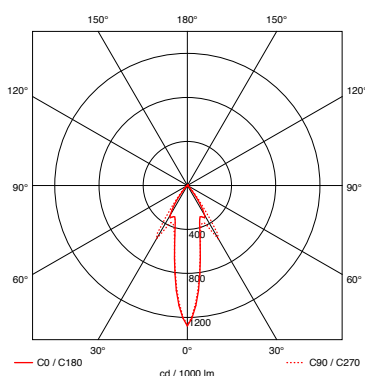
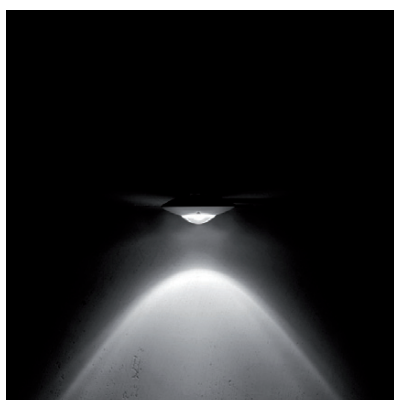


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

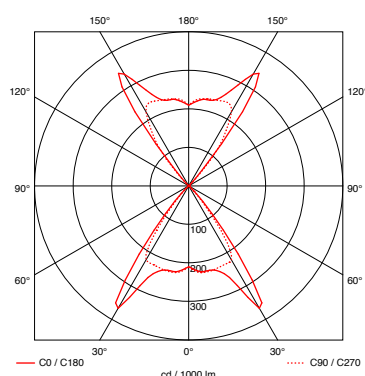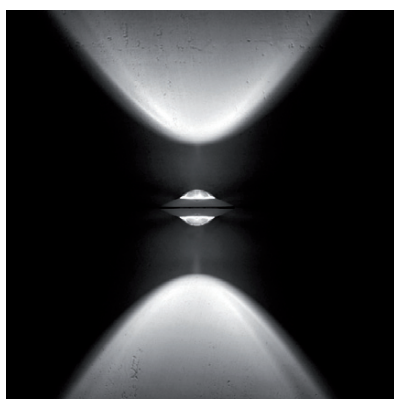


Puro D
reflector head for directed light
in two directions

efficiency of reflector head
68%

Material / Oberfläche
lense optical glass
fixture matt chrome or chrome

Puro verticale recommended lighting effect

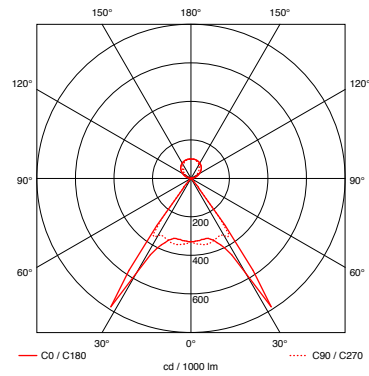

Puro E
reflector head for diffuse light
in one direction and directed light
in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

Item number
_matt chrome M
_chrome C

verticale



max. 60 W
low voltage halogen GY6.35

Lengths incl. reflector heads

20 cm
30 cm
40 cm
60 cm

```
7V 11 00 _
7V 12 00 _
7V 13 00 _
7V 14 00 _
```



Puro A



satinised glass / satinised glass

8K 00 11 _


Puro B



satinised glass / reflector sphere

8K 00 12 _


Puro C



reflector sphere /lense

7 K 00 41 _

Puro D



lense / lens

7K 00 42 _

Puro E



satinised glass/ lense

7 K 00 44 _



Puro verticale
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site

flat box 		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W 		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W 		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W 		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo 		mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
		track version	matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F